



Acoustical Wall & Ceiling Panels

Second Skin Acoustical Wall and Ceiling Panels are designed to solve your acoustical needs while enhancing the aesthetic look of your space. With a variety of options to choose from including sizes, shapes and colors it is easy to create the perfect solution for your reverberation sound problems.

The Second Skin acoustical panel provides the ultimate in acoustical performance with excellent NRC ratings as high as 1.15. They are available in two standard thicknesses: 1" and 2". The panels are constructed with a 6-7# PCF rigid fiberglass absorber core.

The panel edges are chemically hardened and are available in a square or bevel edge profile.



FEATURES

- High-quality, economical, multi-purpose panels
- Excellent acoustical performance
- Class A fire rated
- Custom sizes and shapes



TYPICAL APPLICATIONS

- Schools / Universities
- Auditoriums
- Houses of Worship
- Office Spaces
- Theaters / Studios
- Multi-Purpose Rooms
- Conference Rooms




ACOUSTICAL DATA

THICKNESS	NRC RATING
1"	.80 - .90
2"	1.05 - 1.15



SPECIFICATIONS


Specifications can be downloaded from our website: www.secondskinaudio.com

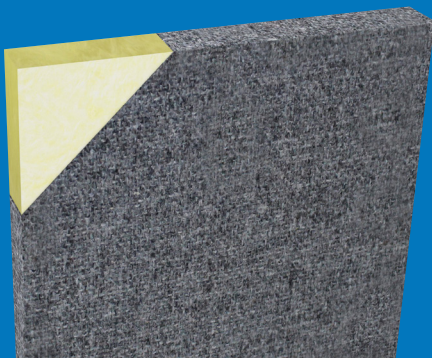

Acoustical Wall & Ceiling Panels

FINISHES & COLORS


Second Skin acoustical wall and ceiling panels are available in Prime Time, FR 701, and Anchorage. Anchorage stock colors include:

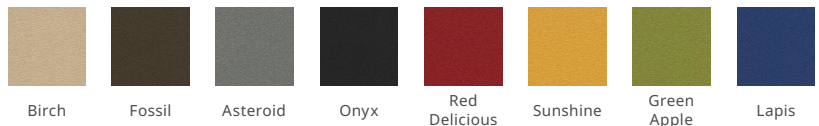

SHAPES & SIZES

- **Square:** 24" x 24" (1" & 2" thick)
- **Rectangle:** 24" x 48" (1" & 2" thick)
- **Plank:** 12" x 48" (1" & 2" thick)
- **Circle:** 24" x 24" (1" thick only)
- **Hexagon:** 24" x 24" (1" thick only)
- **Triangle:** 24" x 24" (1" thick only)

EDGE DETAIL



Square

MOUNTING HARDWARE



Rotofast Anchors



Impaling Clips